


SEPAM automate synchronisation

Schematic solution:

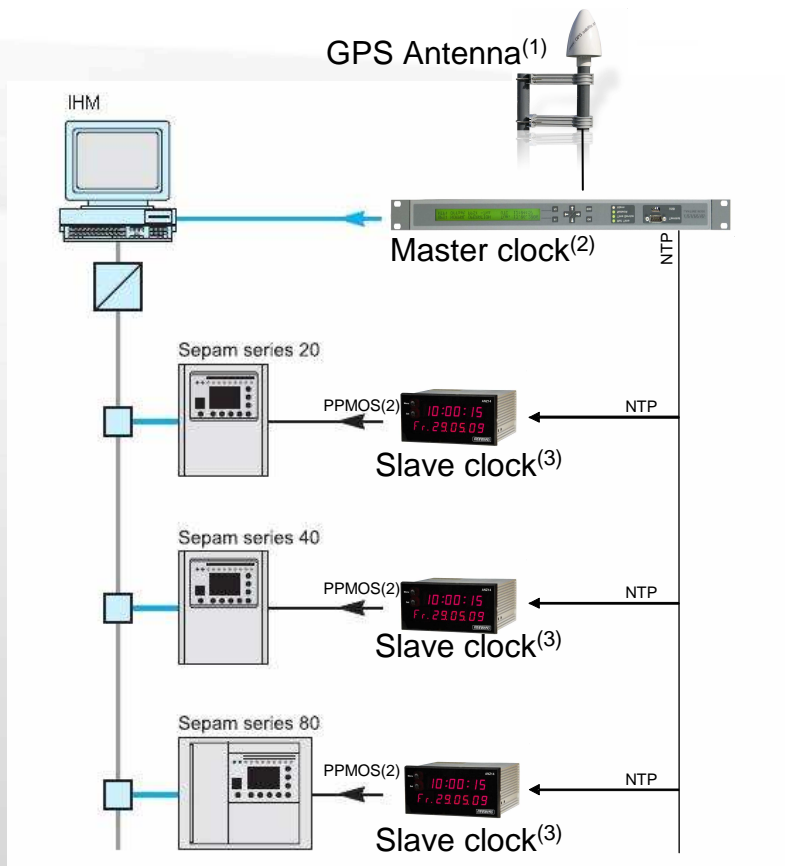

The proposed solution is composed of one « master clock » that delivers the time source to the « slave clocks » by NTP⁽⁴⁾. Slaves clocks have a PPMOS⁽⁵⁾ output that provides SEPAM automates synchronisation.

(1) Antenne GPSANT

(2) LANTIME M300/GPS

(3) ANZ14

(4) NTP: Network Time Protocol

(5) PPMOS: Programmable Pulse Photo-MOS

JTELEC SA - ZA de l'Aqueduc - 24 rue Georges Pompidou - BP 67 - 78690 Les Essarts Le Roi - France
Tél : +33 (0) 1 30 88 91 95- Fax : +33 (0) 1 30 88 91 98