



- **PC104PLUS or PC/104 compatible**
- **DDC or IPC1553 controller**
- **Programmable as Bus Controller or Remote Terminal or Monitor Terminal**
- **Up to 3 Dual Redundant MIL-STD-1553B channels**
- **31 Remote Terminal Control**
- **Direct or Transformer Coupled**
- **Software Driver support for a host of Operating systems / Environments**

OVERVIEW

The ATS-PC104PLUS-1553 card provides a flexible, Single function, dual redundant MIL-STD-1553B interface to the PC/104PLUS embedded bus. It provides the highest level of performance & flexibility for MIL-STD-1553B protocol on the PC/104PLUS bus. The ATS-PC104PLUS-1553 offers Simulation, Monitoring functions. The card comes integrated with powerful software that reduces application development time. All data bus functionality is supported by our advanced API (Application Programming Interface).

HARDWARE

The ATS-PC104PLUS-1553 single function architecture can emulate as a Bus Controller or 31 Remote Terminal or Monitor Terminal modes. Polling and interrupt generation is also provided.

Transformer and Direct Coupling

The card can be configured to work either in the transformer-coupled mode or in the direct-coupled mode. Jumpers are provided on the cards to select the mode. It is configured to work in the transformer-coupled mode by default.

SOFTWARE

The ATS-PC104PLUS-1553 software includes:

- Bus Monitor
- Drivers & APIs

Bus Monitor

- Record and replay of data
- Replay with rate selection
- Message identifier
- Multi console at a time
- Bus ideal time analyzer
- Filtering option up to sub address
- Message sampling option

Drivers & APIs

The card comes with a powerful set of library functions to access the entire MIL-STD-1553B functionality. The drivers are designed in a modular fashion consisting of component functions and application functions. The user's test program can be developed with few calls to the driver by using the set of application functions provided.

Driver and high-level API libraries for DOS, Windows 98/2000/NT are available. Sample programs for BC, RT, MT modes are included.

PRODUCT SPECIFICATIONS

MIL-STD-1553B Interface

- Programmable as Bus Controller or Remote Terminal or Monitor Terminal
- Up to 3 Dual Redundant MIL-STD-1553B channels
- 31 Remote Terminal Control
- Message formats BC-RT, RT-BC, RT-RT, Broadcast, System Control
- Direct or Transformer coupled

DDC Controller

Bus Controller

- 64K words of SRAM per channel for DDC controller
- Automatic retries on alternate bus
- Inter Message Gap from 8 s to 65ms
- Frame auto repeat up to 5s
- Programmable response timeout up to 130 s Remote Terminal
- Programmable command illegalization
- Programmable Single Message or double buffering or circular buffering
- BUSY Bit programmable by subaddress
- Alpha numeric message ID

Monitor Terminal

- Word monitor per word basis
- Selective message monitor & time stamping
- Dynamic data updation
- Message Periodicity
- Bus error status
- Bus load
- Unique Message identifier
- Record and Replay option
- Message identifier

Software Support

- Driver and high-level API libraries for DOS, Windows 98/2000/Ntare available
- Sample applications will be provided to help users quickly setup and use the card.

Physical

- Standard PC/104 card size (3.55in x 3.75in)

Environmental

- Operating temperature: 0° C to +50° C
- Storage temperature: -20° C to +70° C

Power

- +5 +/- 5% VDC supply


Warranty

- 1 year limited warranty

ORDERING INFORMATION

Hardware Selection

ATS-PC104PLUS-1553- Controller - Channels

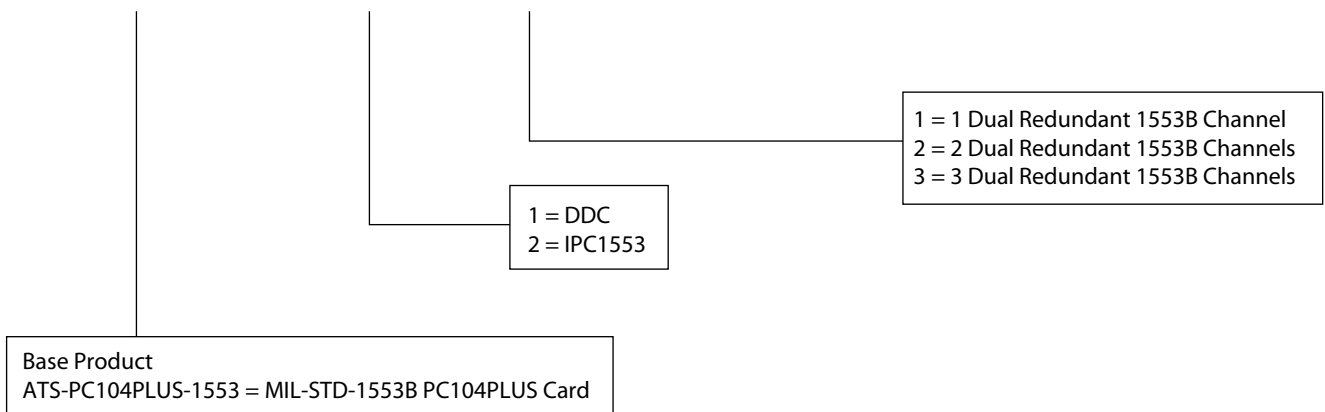

Anuva Technologies Pte Ltd
No.6, Eu Tong Sen Street, The Central, #07-16, Singapore 059817

P +65 6221 8260 F +65 6221 7820

www.anuvatechnologies.com

Distributor/Reseller